




CALOR QUADRA



CALOR ELLIPSE



CALOR HEXA



CALOR RONDO

**PRODUCT INFORMATION:**


Thermal energy:	35,1 kWh
Energy efficiency:	83 %
CO%:	0,09 %
Heat storage capacity:	
	100%    2,5 h
	50%    11,9 h
	25%    19,4 h

**PRODUCT NUMBERS:**

Product	Product number	Weight kg	Height mm
CALOR QUADRA	703360-1	875	1855
CALOR ELLIPSE	703390-1	950	1855
CALOR HEXA	703370-1	875	1855
CALOR RONDO	703380-1	880	1855
CALOR QUADRA B	703365-1	875	1855
CALOR ELLIPSE B	703395-1	950	1855
CALOR HEXA B	703375-1	875	1855
CALOR RONDO B	703385-1	880	1855

**ACCESSORIES:**

	Product number
- Rear heat shield	920454
- Flue connection pipe (connected at the back)	920329



Rear heat shield to reduce the safety distance

## PRODUCT INFORMATION

	FIREWOOD			FLUE CALCULATION VALUES <sup>(1)</sup>				MAX. FLUE TEMPERATURE IN SECURITY TEST
	Length [cm]	Max amount of wood [kg]	Length baking oven [cm]	Flue gas temperature [°C]	Min. flue draught [Pa]	Mass flow [g/s]	Flue connection Ø (min.)	Temperature °C
Calor	25	10	-	216	-12	15,4	160	310

## FLUE CONNECTION TABLE

	RECOMMENDED FLUE [mm]			
	approx. 150x150	approx. 150x200	approx. 150x300	round Ø
Calor	x	x	-	150-180

## SAFETY DISTANCES TO COMBUSTIBLE MATERIALS


	According to EN 15250			
	Behind	On the sides	Top	Front
Calor	150	150	200	1000
Calor with heat shield	50	150	200	1000

1) The flue calculation values apply for countries that require flue calculation in accordance with the DIN 18160 and DIN EN 13384 standards.


### NOTES!

The flue heat category required by the fireplace is T400.

The recommended minimum flue height is 5 m. In countries where the flue calculation is required, should the calculation be done according to the instructions and regulations of the flue calculation.

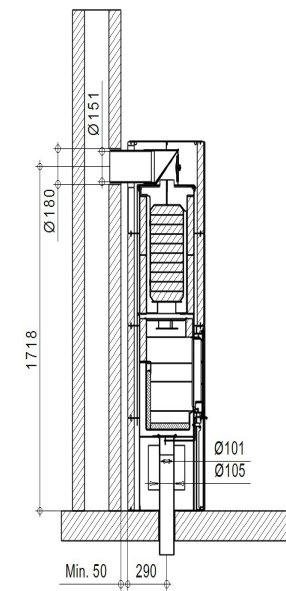

Calor Quadra B  
Calor Hexa B  
Calor Ellipse B

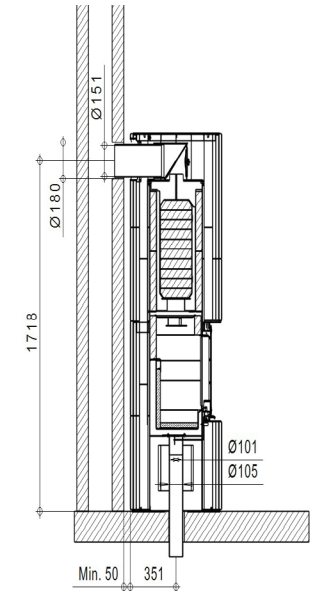

Calor Rondo B