

# 90 ÖKOALPIN LIVING

## WOOD STOVE


Measurements (W x D x H): 900 x 600 x 850-910 mm

Nominal heating power: TBD

Heating efficiency: TBD

Patented adjustable multiple smoke outlet

Available with oven right or left



Optional



PANORAMA  
Natural steel (optional)



PANORAMA  
Stainless steel



PANORAMA  
Black F5

A company from  
**südtirol**


# 90 ÖKOALPIN LIVING

## WOOD STOVE - OVEN ON RIGHT

### Technical data (Data may vary depending on type of fuel used)


Fuel	Wood
Energy efficiency class	A+
Nominal heating power	TBD
Heating efficiency	TBD
$\eta_s$ Seasonal space heating energy efficiency	TBD
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	TBD
Smoke mass	TBD
CO at 13% O <sub>2</sub>	TBD
Weight	230 kg
Possible smoke outlets	5
Test report	TBD
VKF AEA I - No.	TBD
Firebox opening (L x H)	198 x 155 mm
Combustion chamber (L x D x H)	260 x 400 x 310 mm
Drawer (L x D x H)	640 x 420 x 290 mm
Oven (L x D x H)	345 x 420 x 265 mm
Hob (L x D)	800 x 500 mm
Diameter external air intake	Ø 80 mm
CO at 13% O <sub>2</sub> (Carbon monoxide) / NOx (Nitrogen oxide)	TBD
Dust / OGC (Organic compounds)	TBD

TBD=To be defined

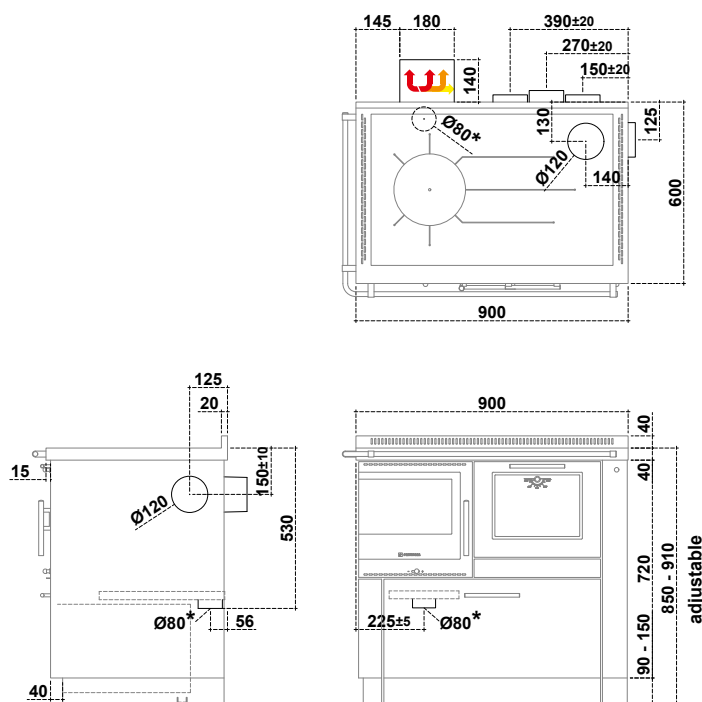

For the version with the oven light (optional), install a Schuko plug either behind the wood drawer at a maximum height of 320 mm from the floor, or at a maximum distance from the kitchen stove of 500 mm

\* External air intake

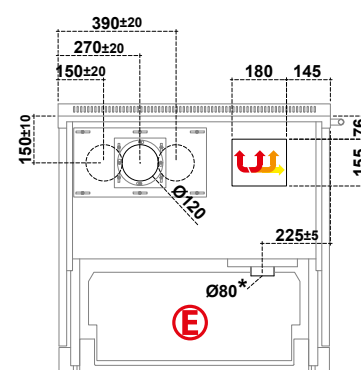

### WARNING:

#### Minimum safety distance from flammable materials

From the rear and side connection to the chimney

\* 40mm of insulation with heat conductivity equal to 0.1 W/mK at 200°C

$P = 0 + 40^* \text{ mm}$

Following agreement with chimney sweep

On the side above the plate

$L = 400 \text{ mm}$

On the side below the plate

$L = 3 \text{ mm}$

Above the plate


$\text{Min. } 750 \text{ mm}$

In the front from the middle of the fire door

$R = 250 \text{ mm}$

Plate for floor protection

Based on specific country directives

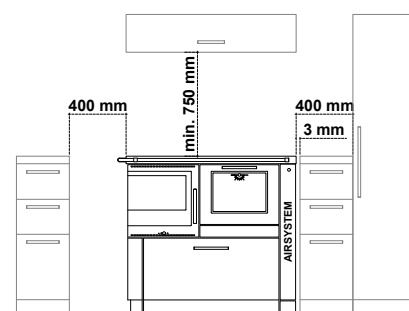


# 90 ÖKOALPIN LIVING

## WOOD STOVE - OVEN ON LEFT

### Technical data (Data may vary depending on type of fuel used)




Fuel	Wood
Energy efficiency class	A+
Nominal heating power	TBD
Heating efficiency	TBD
$\eta_s$ Seasonal space heating energy efficiency	TBD
Diameter smoke outlet	Ø 120 mm
Minimum draught	12 Pa / 0,12 mbar
Temperature smoke outlet	TBD
Smoke mass	TBD
CO at 13% O <sub>2</sub>	TBD
Weight	230 kg
Possible smoke outlets	5
Test report	TBD
VKF AEA1 - No.	TBD
Firebox opening (L x H)	198 x 155 mm
Combustion chamber (L x D x H)	260 x 400 x 310 mm
Drawer (L x D x H)	640 x 420 x 290 mm
Oven (L x D x H)	345 x 420 x 265 mm
Hob (L x D)	800 x 500 mm
Diameter external air intake	Ø 80 mm
CO at 13% O <sub>2</sub> (Carbon monoxide) / NOx (Nitrogen oxide)	TBD
Dust / OGC (Organic compounds)	TBD

TBD=To be defined

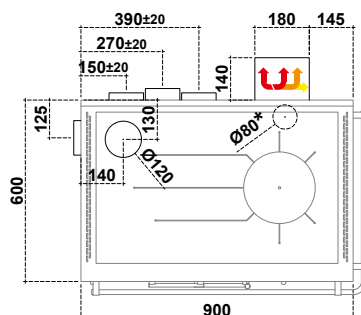

For the version with the oven light (optional), install a Schuko plug either behind the wood drawer at a maximum height of 320 mm from the floor, or at a maximum distance from the kitchen stove of 500 mm

\* External air intake

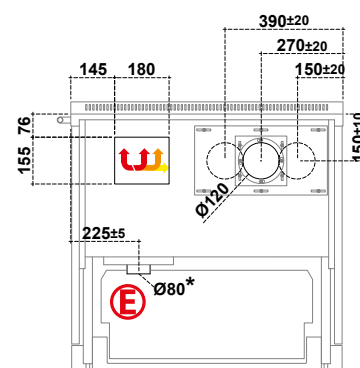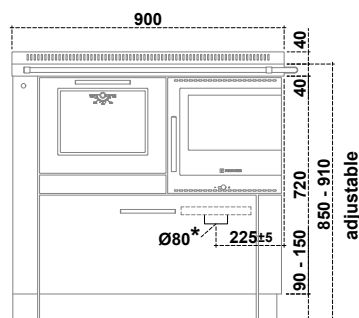

### WARNING:

#### Minimum safety distance from flammable materials

From the rear and side connection to the chimney

\* 40mm of insulation with heat conductivity equal to 0.1 W/mK at 200°C

P= 0 + 40\* mm

Following agreement with chimney sweep

On the side above the plate

L= 400 mm

On the side below the plate

L= 3 mm

Above the plate

Min. 750 mm

In the front from the middle of the fire door

R= 250 mm

Plate for floor protection

Based on specific country directives

